

TEST REPORT

The Intertek logo consists of the word "Intertek" in a white, sans-serif font, centered within a dark blue rounded rectangular background.

REPORT NUMBER: 100208005SAT-001
ORIGINAL ISSUE DATE: October 20, 2010
REVISED DATE: N/A

EVALUATION CENTER
Intertek Testing Services NA Inc.
16015 Shady Falls Rd.
Elmendorf, TX 78112

RENDERED TO
Gaco Western
521 Biddle St.
Waukesha, WI 53168

PRODUCT EVALUATED: Gaco Green 052 0.5 pound open cell Spray Foam
with 14 wet mils of TPR² IB4 on walls and ceiling
EVALUATION PROPERTY: Heat Release, Flame Spread

Report of testing Gaco Green 052 0.5 pound open cell Spray Foam with 14 wet mils of TPR² IB4 on walls and ceiling for compliance with the applicable requirements of the following criteria: ICC-ES AC377 Appendix X, Approved June, 2010.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

1 Table of Contents

INTRODUCTION	3
TEST SAMPLES	3
TESTING AND EVALUATION METHODS	3
TESTING AND EVALUATION RESULTS	5
CONCLUSIONS	6
APPENDICES	
Appendix A: DATA	7
Appendix B: PHOTOGRAPHS	12
LAST PAGE	16

2 Introduction

Intertek Testing Services NA (Intertek) has conducted testing for Gaco Western on Gaco Green 052 0.5 pound open cell Spray Foam with 14 wet mils of TPR² IB4 on walls and ceiling to evaluate heat release and flame spread properties when subjected to specific ignition conditions. Testing was conducted in accordance with ICC-ES AC377 Appendix X, Approved June, 2010. This evaluation was performed on October 20, 2010.

3 Test Samples

3.1. SAMPLE SELECTION

The subject test specimen is a traceable sample selected from the manufacturer's facility. Intertek selected the specimen and has verified the composition, manufacturing techniques and quality assurance procedures.

3.2. SAMPLE AND ASSEMBLY DESCRIPTION

The three walls of the test specimen consisted of 2x8 studs spaced 24" o.c. The ceiling was constructed using 2x12 joists spaced 24" o.c. running parallel to the side walls. The exterior of the studs and joists were covered with 5/8" thick, Type X, gypsum board. The final interior dimensions were 8 feet high, 8 feet wide and 12 feet deep.

The stud cavities were filled with 7.5 inches of Gaco Green 052 0.5 pound open cell Spray Foam with 14 wet mils of TPR² IB4 and the joists had 11.5 inches of Gaco Green 052 0.5 pound open cell Spray Foam with 14 wet mils of TPR² IB4. The back corners of the room are applied so that they meet the criteria per Figure X3 in AC377.

4 Testing and Evaluation Methods

This standard describes a method for determining the contribution of spray foamed plastic to room fire growth during specified fire exposure conditions. This method is not intended to evaluate the fire endurance of assemblies, nor is it able to evaluate the effect of fires originating within the wall assembly. The method is not intended for the evaluation of floor finishes.

The test indicates the maximum extent of fire growth in a room, the rate of heat release, and if they occur, the time to flashover and the time to flame extension beyond the doorway following flashover. It does not measure the fire growth in, or the contribution of, the room contents. Time to flashover is further noted by a pair of crumpled single sheets of newspaper placed on the floor 2 feet out from the center of the rear wall and front walls to determine flashover per the NFPA 286 method. The spontaneous ignition of this newspaper provides the visual indication of flashover.

The potential for spread of fire to other objects in the room, remote from the ignition source, is evaluated by measurements of:

1. The total heat flux incident on the center of the floor.
2. A characteristic upper-level gas temperature in the room.
3. Instantaneous net peak rate of heat release.
4. Projection of flames out the doorway.

The potential for the spread of fire to objects outside the room of origin is evaluated by the measurement of the total heat release of the fire.

TEST EQUIPMENT AND INSTRUMENTATION

IGNITION SOURCE

The ignition source for the test is a gas burner with a nominal 12- by 12-inch porous top surface of a refractory material. The burner used at this laboratory is filled with a minimum 4-inch layer of Ottawa sand.

The top surface of the burner through which the gas is applied is positioned 12 inches above the floor. The burner has a 1 inch wide steel lip around its edge, which is placed in contact with the wall such that the edge of the diffusion surface is located 1 inch from both walls in the corner of the room opposite from the door.

The gas supply to the burner is C.P. grade propane (99 percent purity). The burner is capable of producing a gross heat output of 40 ± 1 kW for five minutes followed by a 160 ± 5 kW for ten minutes. The flow rate is metered throughout the test. The design of the burner controls is such that when one quarter-turn ball valve is opened, the flow of gas to the burner produces 40 kW and when a second quarter-turn valve is opened the combined flow produces 160 kW.

COMPARTMENT GEOMETRY AND CONSTRUCTION

The interior dimensions of the floor of the fire room, when the specimens are in place, measures 8 feet, by 12 feet. The finished ceiling is 8 feet \pm 0.5 inches above the floor. The four walls are at right angles defining the compartment. The compartment contains a 30 \pm 0.25 by 80 \pm 0.25 inch doorway in the center of one of the 8' by 8' walls. No other openings are present to allow ventilation.

PROCEDURE

SUMMARY OF METHOD

A calibration test is run within 30 days of testing any material as specified in the standard. All instrumentation is zeroed, spanned and calibrated prior to testing. The specimen is installed and the diffusion burner is placed. The collection hood exhaust duct blower is turned on and an initial flow is established. The gas sampling pump is turned on and the flow rate is adjusted. When all instruments are reading steady state conditions, the computer data acquisition system and video equipment is started. Ambient data is taken then the burner is ignited at a fuel flow rate that is known to produce 40 kW of heat output. This level is maintained for five minutes at which time the fuel flow is increased to the 160 kW level for a 10-minute period. During the burn period, all temperature, heat release and heat flux data is being recorded every 6 seconds. At

the end of the fifteen minute burn period, or failure the burner is shut off and all instrument readings are stopped. Post test observations are made and this concludes the test.

All damage is documented after the test is over, using descriptions, photographs and drawings, as is appropriate.

4.1. TEST STANDARD

ICC-ES AC377 Appendix X, Approved June, 2010. acceptance criteria for spray-applied foam plastic insulation.

5 Testing and Evaluation Results

5.1. RESULTS AND OBSERVATIONS

FIRE TESTS

The test was started at 8:10 a.m. on October 20, 2010. The ambient temperature was 70°F with a relative humidity of 74%. The data acquisition system was started and the burner was ignited. Events during the test are described below:

TIME (min:sec)	OBSERVATION
0:00	Ignition of burner. Heat output set to 40 kW.
0:12	Discoloration
0:13	Light smoke
0:26	Ignition
0:35	Increase in smoke
2:00	Intermittent flaming back wall
3:00	Flame tips 3ft vertically above burner
4:18	Continue test – per clients request
5:00	Increase 160kW
5:05	Horizontal flaming 2ft on ceiling
5:12	Horizontal flaming 4ft on ceiling
5:31	Heavy smoke
5:45	Back target ignites
5:47	Flames out door – Test terminated

Test Data


Criteria	Time (min:sec)
Heat Release Rate >1000kW	Did not occur
Heat Flux >20KW/m ²	5:42
Average ceiling temperature > 600°C (1112°F)	5:30
Flames out the door	5:47
Average of the above	5:40

6 Conclusions

ICC-ES AC377 Appendix X pass/fail criteria require the assembly to meet or surpass 4:18 min:sec. This assembly **met** the requirements.


INTERTEK TESTING SERVICES NA

Reported by:



Troy G. Bronstad
Senior Associate Engineer

Reviewed by:




C. Anthony Peñaloza
Engineering Team Leader


APPENDIX A

Test Data


Thermocouple Data

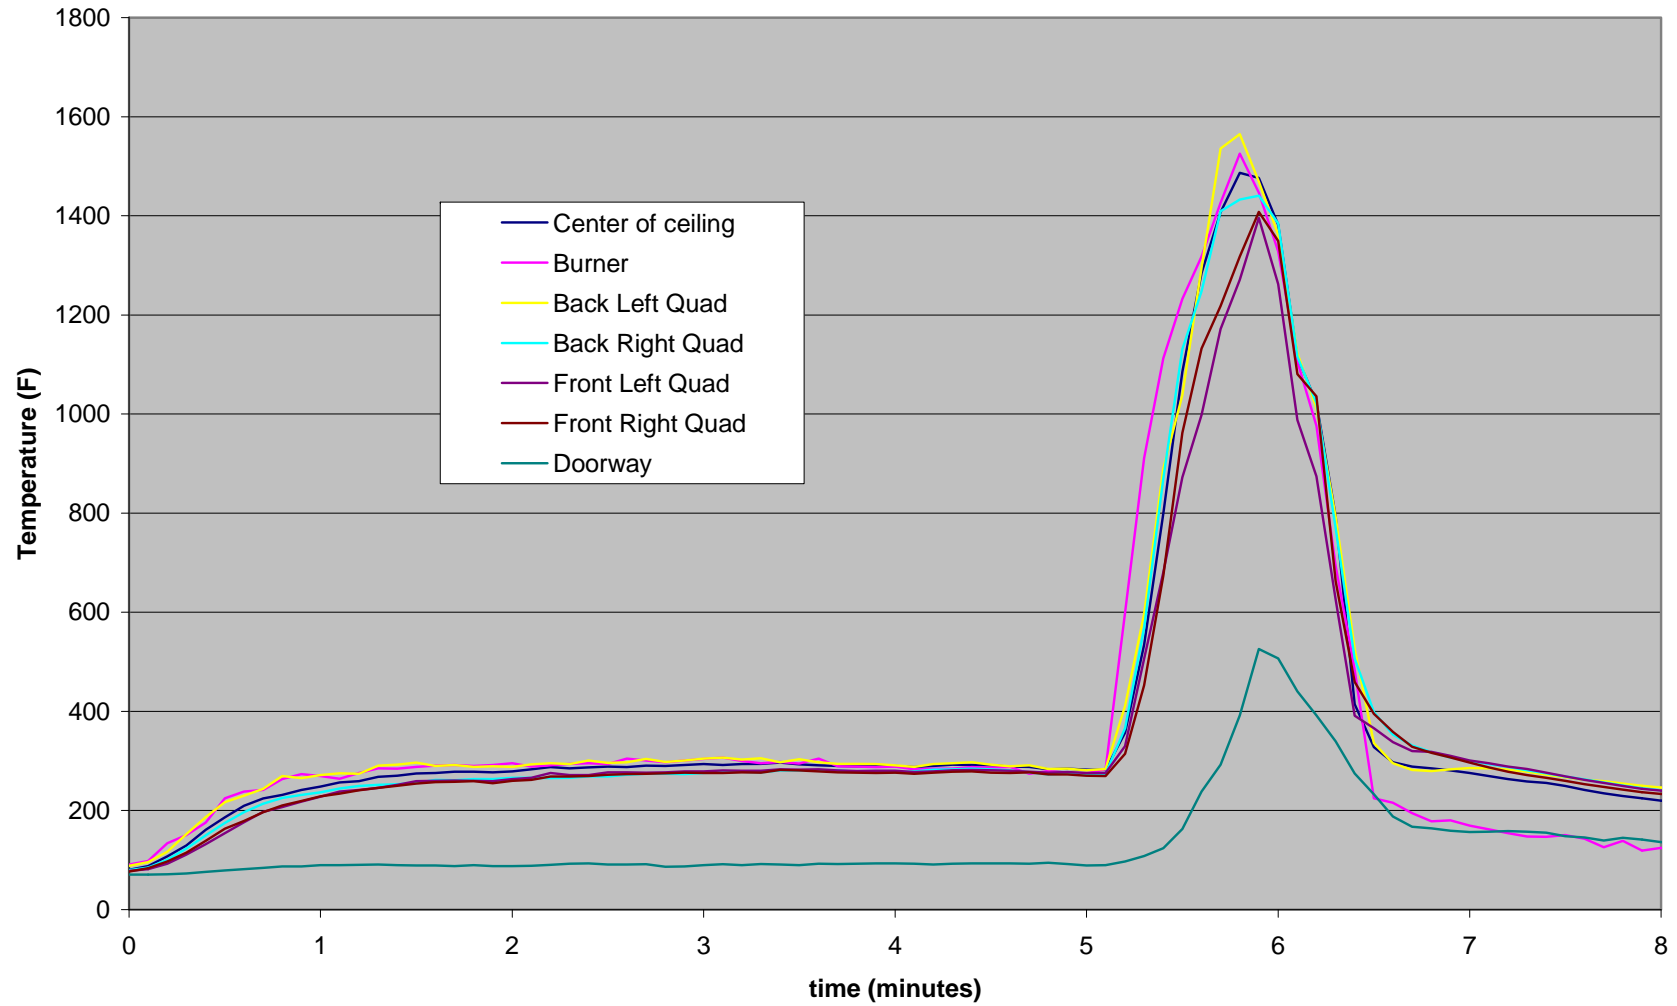


Smoke Release

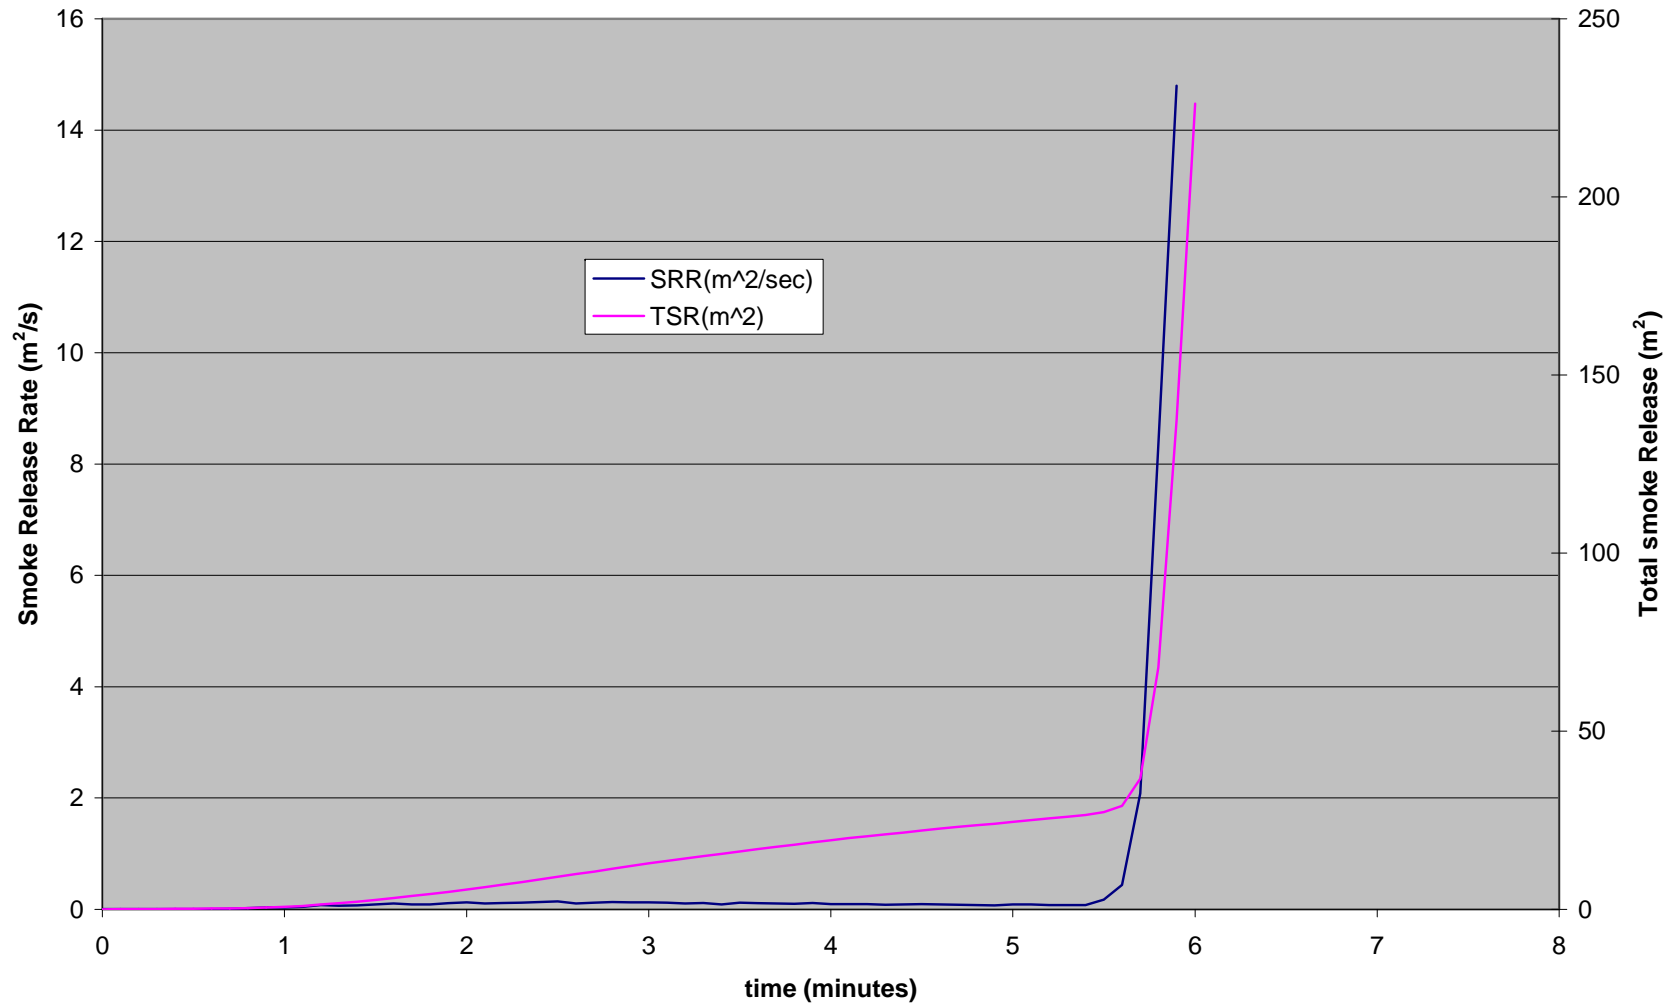

Heat Release

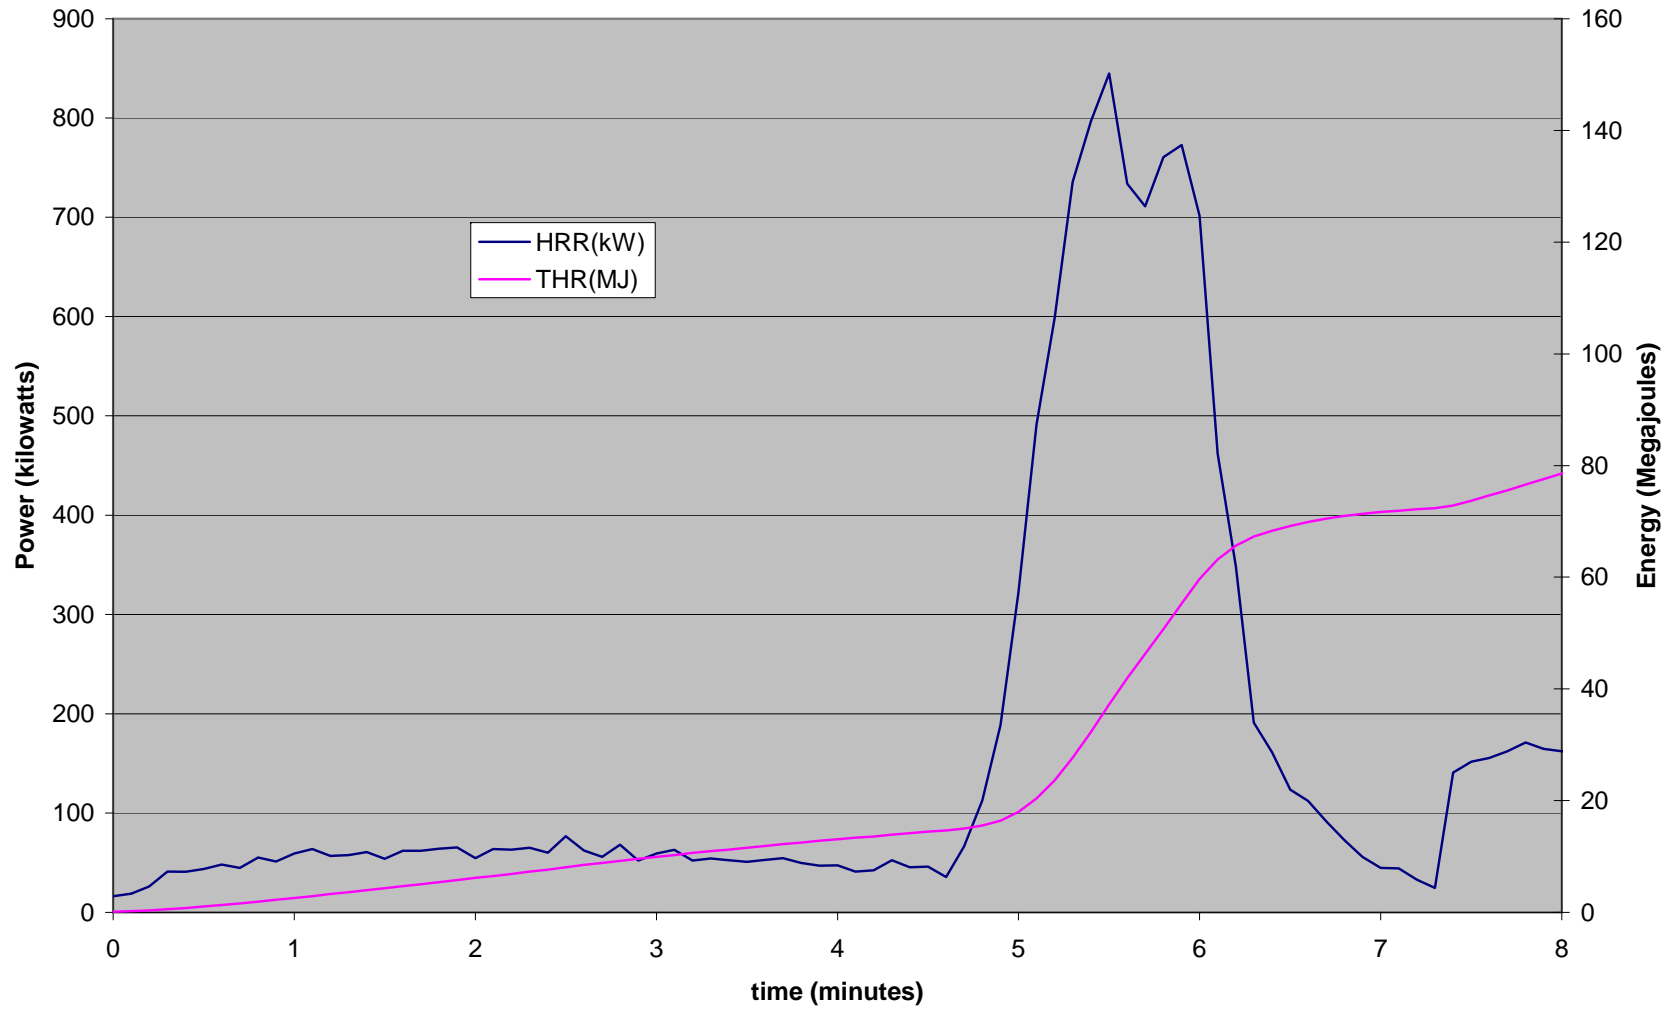

Radiant Heat

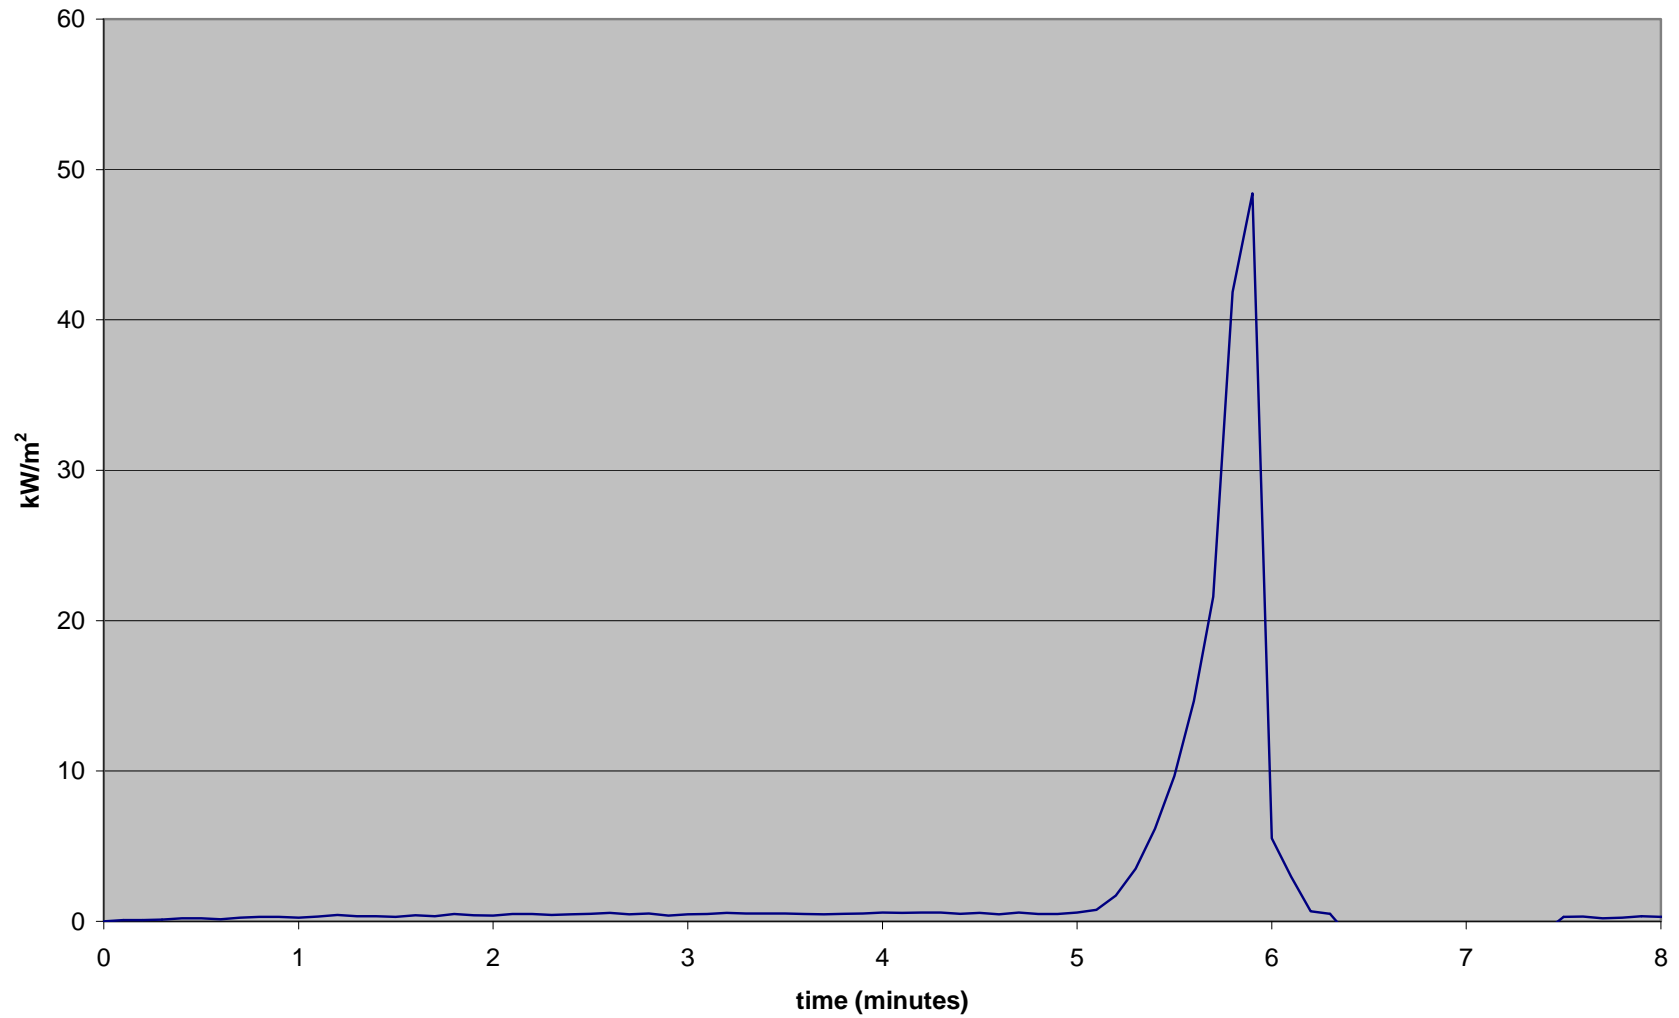

APPENDIX B

Photographs



Pre-test photo



Start of test



Test photo.



Test photo



Flames out door



Post test photo

LAST PAGE OF TEST REPORT

REVISION SUMMARY

DATE	SUMMARY
October 20, 2010	First issue. No revisions.